


Compact Splicing Connector

Light color

Pas de
couleur

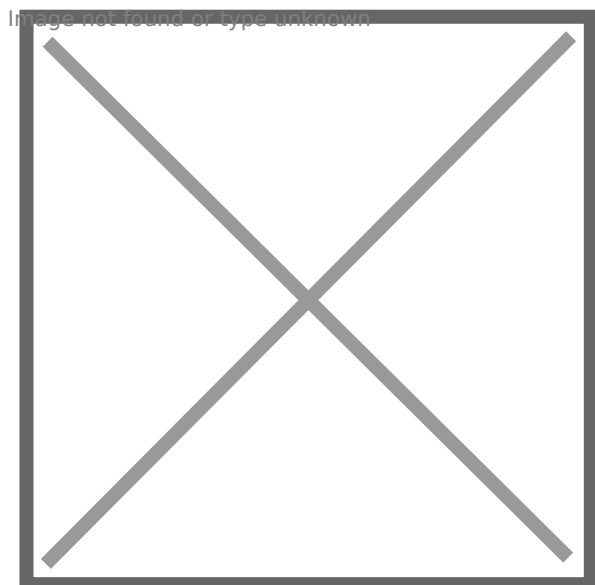

Technical Specification

Warranty		2 Years	Total number of connection points		2
Rated voltage		400V	Total number of potentials		1
Rated impulse voltage		4kV	Type of wiring		Side-entry wiring
Rated Current		32A	Width		13.1 mm / 0.516 inch
Rated current UL (use group C)		20A	Height		8.3 mm / 0.327 inch
Connection technology		CAGE CLAMP®	Depth		18.6 mm / 0.732 inch
Actuation type		Lever	Body Color		transparent
Connectable conductor materials		Copper	Flammability class per UL94		V2
Nominal cross section		4 mm ²	Weight of Product		1.6 gr
Solid conductor	0.2 ... 4 mm ² / 24 ... 12 AWG		EAN Code		3800156660014
Fine-stranded conductor	0.14 ... 4 mm ² / 24 ... 12 AWG		Product Code		AC1-B7
Strip length	11 mm / 0.43 inch		Light Color		Pas de couleur